SIMPLICITY BUBBLER AUTOFILL LID

CRATHCO Autofill

No More Refilling. No More Downtime.

NEW Simplicity Bubbler Autofill Lids automate your beverage program and keep your profits on track. Autofill ensures your Bubblers are consistently full and fresh all day long.

> Ideal for Bag-in-Box & In-House Concentrate Programs

CRATHCO


SIMPLICITY BUBBLER AUTOFILL LID

Streamline Beverage Operations

Replace your current Simplicity Bubbler lid with Crathco's Autofill Lid System. Your cold/non-carbonated dispensed offerings will always be fresh and available,

- Increased Visual Appeal always available, increasing sales
- Enhanced Accuracy and Consistency automatically adds the perfect amount of water and syrup every time
- Reduced Labor keeps staff focused on customers
- Minimizes Training simple set-up and operation
- Reduced Downtime manual re-filling is time-consuming
- Increased Food Safety minimal exposure to product
- Seamless Integration update existing equipment or your entire system
- Waste Reduction prevents loss from incorrectly mixed product
- Versatile perfect for BIB or in-house syrup programs



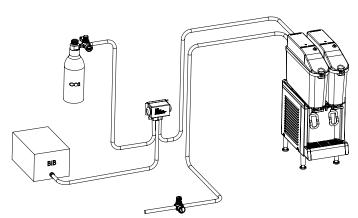

HERE'S HOW AUTOFILL WORKS

Parts included: 1 water regulator, 2 fitting threads: 1/4" tube OD. 3/8", 1 pressure gauge

- Automatically senses drink volume through integrated lid sensor.
- When level falls below the probe, fill tube automatically refills the bowl with the perfect blend of BIB syrup and water.
- Post Mix process mixes beverage syrup in the bowl.
- "Sold Out" switch alerts operator (by red indicator lights) syrup is low or water connection needs attention.
- Beverage syrup ratio can be set to specific needs. Controlled by gas pressure.
- Integrated LED light improves product display.
- Optional gas pump with special model supports for pulpy products.

Product Shipping Dimensions Dimensions HxWxD Model Description Electrical HxWxD Product Wt. Shipping Wt. 20.28" x 16.1" x Autofill Simplicity AFS-29-16 120V 60hz 1ph 3A 17.8" x 6.7" x 4.8"* 16.5 lbs LV606096 7.4 lbs 9.57"

Water Supply: Min 30psi/Max 120psi • CO₂: Max 60psi • Low Pressure Cut-Off: >5psi Compatible with Simplicity Bubbler Models CS-2E-16 and CS-4E-16 *Includes Water Level Probe



SPECIFICATIONS



169/3, Moo. 3, Tambol Nonglalok, Amphur Ban Khai, Rayong 21120, Thailand, www.grindmaster.com/crathco